

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 777 008 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**25.04.2001 Bulletin 2001/17**

(51) Int Cl.7: **D06H 1/02**

(21) Application number: **96402026.7**

(22) Date of filing: **25.09.1996**

(54) **Hot melt ink jet shademarking system for use with automatic fabric spreading apparatus**

Tintenstrahlgerät mit heisserschmelzender Tinte für Schattierungsmarkierung zur Verwendung in  
automatischen Stofflegevorrichtungen

Dispositif à jet d'encre utilisant de l'encre liquéfiée par la chaleur pour marquage de nuances dans  
les dispositifs de matelassage

(84) Designated Contracting States:  
**BE DE ES FR GB IT**

(30) Priority: **29.11.1995 US 564588**

(43) Date of publication of application:  
**04.06.1997 Bulletin 1997/23**

(73) Proprietor: **LEVI STRAUSS & CO.**  
**San Francisco, California 94111 (US)**

(72) Inventor: **Hennig, Cynthia Lou**  
**Dallas, Texas 75219 (US)**

(74) Representative: **Kopacz, William James**  
**83, Avenue Foch**  
**75116 Paris (FR)**

(56) References cited:  
**DE-A- 3 436 231 US-A- 3 902 413**  
**US-A- 4 092 020 US-A- 5 043 741**

• **PATENT ABSTRACTS OF JAPAN vol. 012, no.**  
**292 (M-729), 10 August 1988 & JP 63 069684 A**  
**(AGENCY OF IND SCIENCE & TECHNOL), 29**  
**March 1988,**

**EP 0 777 008 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****FIELD OF THE INVENTION**

[0001] The present invention relates generally to fabric processing and marking systems, and more particularly to an ink jet shademarking system incorporated into an automated fabric handling device.

**BACKGROUND OF THE INVENTION**

[0002] It is critical in the garment and apparel manufacturing industries to maintain the roll integrity of cut fabric pieces during the sewing process, to ensure that the various pieces ultimately sewn together in a completed garment are substantially uniform in coloration and shading. Since the component parts of garments are often cut simultaneously from many layers of material, an identification mechanism is essential to avoid the inclusion of mismatched fabric pieces. This identification is frequently accomplished by shademarking the back side of the material as it is processed through either a fabric spreader or a loom weaving apparatus, so that after the cutting process is complete the markings on the various fabric pieces can be matched to ensure that only consistent fabric sources are used.

[0003] Prior art shademarking devices utilize only conventional contact printing techniques, often with a mechanical stamping apparatus such as that disclosed in Blessing, U.S. Patent No. 4,092,020 or Powell *et al.*, U.S. Patent No. 3,902,413. Unfortunately, these devices often fail to produce sufficiently visible characters, or alternatively the characters may be unrecognizable due to the spreading of the applied ink on the rough weave surfaces of fabric and textiles. This problem is compounded in shademarking systems utilizing water- or oil-based ink compositions, which can bleed through and stain light-colored fabrics. In addition, the fabric can tear if the printing mechanism snags on the passing fabric, and the rollers of the conventional printing mechanisms can further stretch and damage the fabric. Moreover, these contact-oriented marking systems must be inspected and cleaned several times a day, to remove the fabric fibers and lint that collect on the printing mechanism while it is in contact with the moving fabric.

[0004] What is needed is a contactless shademarking system incorporated into a fabric handling device, which can generate highly visible and accurate identification markings on the back side of the fabric, while reducing both routine maintenance requirements and the risk of accidental ink spillage. The system should provide a comprehensive control means offering a wide choice of character markings to ensure maximum visibility and minimum ink consumption.

[0005] A prior art device for marking a fabric for identification using contactless printheads which spray ink on the fabric is known from document DE-A-3 436 231.

[0006] There is also known from document US-A-5

043 741 a hot melt ink jet system having a temperature control system for maintaining the temperature of the substrate at an appropriate temperature, typically on the order of 25°C.

**SUMMARY OF THE INVENTION**

[0007] Accordingly, it is an object of the present invention to overcome the problems encountered in the prior art, by providing a contactless shademarking system incorporated into a fabric handling device. The improved shademarking system of the present invention applies a wax or polymer composition, with or without pigment, to the back side of the fabric as it passes through the fabric handling device, by the use of hot melt ink jet technology. The hot melt ink jet marking system of the present invention provides an accurate reproduction of the shademarking character or symbol, eliminating the prior art problems of ink smearing and bleed-through on light-colored fabrics.

[0008] Moreover, the incorporation of hot melt ink jet technology into the fabric spreading process also enables the operator to switch between any number of images and characters without the need to halt the production line and change printing plates. In the present invention, the ideal character or graphic symbol can be manually selected, or automatically changed at the beginning of each roll, for a given type of material, to ensure maximum visibility and minimum ink consumption. It is also intended that the present invention will automatically adjust the firing of the ink jet printheads based on information regarding the width of the fabric which is selected by the operator.

[0009] The present invention provides an array of ink jet heads mounted on a head mount beam, which is positioned on a fabric spreader so that the back side of the moving substrate of fabric travels past the ink jet printheads. A single reservoir is preferably supplied for providing the marking composition to the printheads, with an automatic ink level sensing system that alerts the operator to refill the reservoir well before the system runs out. It is further contemplated that the ink jets would be maintained at a higher temperature than the reservoir, and that a solid print medium could be used to fill the reservoir for ease of handling and to create a spill-free environment. The color of the ink composition can also be easily changed to ensure maximum visibility on different color fabrics.

[0010] The present invention also provides a central control means to coordinate the operation of the printheads, with a separate control panel for the operator to select the fabric width as well as manage the printheads themselves. The present invention further incorporates the programming for the central control means, including instructions for printing the specific characters or graphic symbols. It is intended that the programming of the present invention will optimize the characters and graphic symbols for each type and color of fabric, to en-

sure ease of recognition and minimum ink consumption. The information entered by the operator will allow the central control means to select the appropriate image and relay the image data to the printheads for printing. [0011] The present invention also contemplates a process for the marking of fabric and textiles on a fabric spreading machine, which comprises applying to the fabric one or more images by means of the hot melt ink jet apparatus disclosed above.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Figure 1 is an overhead perspective view of a contactless shademarking system of the present invention, mounted on a fabric handling device with a processed roll of fabric.

[0013] Figure 2 is an overhead perspective view of a contactless shademarking system of the present invention, mounted on a fabric handling device without roll of fabric threaded.

[0014] Figure 3 is a cut-away overhead view of the left and right ends of the Head Mount Beam, showing the printheads beneath the top roller.

[0015] Figure 4A is a cross-sectional view of the Head Mount Beam identified in Figure 3, showing the printhead mechanism and associated circuit boards.

[0016] Figure 4B is a close-up view of a printhead mounted on the Head Mount Beam, with the umbilical attachment.

[0017] Figure 5A is a side view of the right end of the Head Mount Beam, showing the ink reservoir and associated control boards and umbilicals.

[0018] Figure 5B is a side view of the left end of the Head Mount Beam, showing the pressure regulator control boards and solenoid valves.

[0019] Figure 6 is a front view of the operator control panel.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0020] In the hot melt ink jet shademarking system of the present invention, a Head Mount Beam (10) is attached to a fabric handling device (5) such as, for example, a fabric spreader or loom, via conventional bracketry. See Figure 1. It is contemplated that any make and model of fabric spreading device, such as those manufactured by Saber Industries, Nashville, Tennessee, or Niebuhr/Gerber Garment Technology, Inc., Tolland, Connecticut, would be suitable for use with the present invention. It is further contemplated that the present invention can be easily configured for attachment to other types of fabric handling devices, such as loom weaving devices, with only minimal alterations.

[0021] As shown in Figure 1, in the present invention the fabric (6) is unwound from a driven roll (7) and directed over the Head Mount Beam (10), by means of top (11) and bottom (12) rollers located on the Head

Mount Beam (10). See Figure 4A. A dancer bar (13) is mounted on the fabric handling device (5) beneath the Head Mount Beam (10) to redirect the fabric from the Head Mount Beam (10), and to maintain sufficient tension in the fabric (6) as it passes the printheads (PH1-PH13). See Figure 1. In a preferred embodiment, the fabric (6) is horizontally redirected around the dancer bar (13) and laid out on a flat surface in a continuous manner, by means of a conventional carriage mechanism (*not shown*) underneath the fabric handling device (5).

[0022] A series of commercial ink jet printheads (PH1-PH13) are positioned along the Head Mount Beam (10) and uniformly spaced to cover a predetermined maximum fabric width. See Figures 2 & 3. In the preferred embodiment shown in Figure 2, there are thirteen hot melt ink jet printheads (PH1- PH13) spaced apart on the Head Mount Beam (10) by 13.97 cm (5.5 inches) covering a maximum fabric width of 183 cm (72 inches). It is contemplated that each printhead (PH1- PH13) will repeatedly and simultaneously image the same alphanumeric character or graphic symbol, which will be defined in a bit-mapped format and stored in the memory of a central control means. (20)

[0023] Each printhead (PH1- PH13) is preferably controlled by its own printhead circuit board set (PCB1- PCB13), which is operatively connected with the central control means (20) preferably via a serial communication link. In the preferred embodiment, these printhead circuit board sets (PCB1- PCB13) are located adjacent to the printheads (PH1- PH13) on the Head Mount Beam (10). See Figure 3. As shown in Figure 4A, the printhead circuit board set (PCB1- PCB13) further consists of a head controller board (31) and a head driver board (30). These circuit boards (PCB1- PCB13) are provided with power and high speed image data from the central control means (20), for printing the desired character or graphic symbol.

[0024] The image can be formed by any suitable ink jet printing technique. The preferred embodiment utilizes an on-demand ink jet printing technique, whereby the marking composition is fed under pressure from a reservoir to the printheads, via a valving means described in more detail below. Piezoelectric projection is then used to dispense the marking composition through the nozzle of the printhead as discrete droplets, in the desired sequence to form the required image on the fabric. Typical of ink jet printheads suitable for use in the present invention are the Model HDS 96i industrial printheads manufactured by Spectra, Inc., Hanover, New Hampshire.

[0025] The present invention also preferably incorporates an individual drip tray (32) underneath each printhead (see Figure 4B), as well as a purge and test fire switch (33). The purge and test fire switch (33) allows the operator to purge each umbilical and printhead, in order to clear the lines of air bubbles that are created when the machine is turned off. An in-line filter (*not*

shown) is provided in the umbilical line leading to the printhead, which in a preferred embodiment consists of a sintered metal filter placed in the umbilical line (40) before the connection with the printhead. The head mount beam further incorporates a fan (35) with a corresponding fan filter (34) for positively pressurizing the interior to keep lint away from the heads and electronics. [0026] It is contemplated that the wax- or polymer-based marking composition utilized in the present invention would be solid at ambient temperatures, heated and disbursed through the printheads as a liquid, and subsequently converted back into a solid when applied onto the cooler surface of the fabric. Because the ink is a hot melt, it does not penetrate or bleed through the fabric. Using a wax- or polymer-based hot melt composition also aids in keeping the characters as visible as possible and leaving them free of any smudges. It is further contemplated that the hot melt ink can be provided with or without a dye or pigment, and also that the ink can be made permanent or alternatively can be made removable by washing. It is also preferred that the ink be supplied in a solid pellet configuration, which is designed to optimize ease of loading with minimal chance for overfilling, and to guard against splashing and entry of dirt into the ink reservoir. With this configuration the color of the ink may also be easily changed for different types and colors of fabrics, with little waste of unused ink. A marking composition suitable for use in the present invention can be obtained from Spectra, Inc., Hanover, New Hampshire.

[0027] As shown in Figures 4B and 5A, the printheads (PH1- PH13) are attached via umbilical lines (40) to a single, high capacity ink reservoir (41), preferably mounted on the Head Mount Beam (10). The ink reservoir (41) can be constructed of metal, plastic, or any other suitably rigid material. The ink reservoir further incorporates a cover (42) and a replaceable inlet filter basket (43). In the preferred embodiment, a cover interlock switch is provided to disable the printing mechanism, so that the system will not print and the spreader will not run with the cover open. In addition, the ink reservoir (41) is preferably designed so that ink pellets loaded through the top slide into the reservoir, rather than drop in, to minimize any splashing of the melted ink already in the reservoir (41).

[0028] It is further intended that a low-on-ink sensor (44) be incorporated into the ink reservoir (41), to interface with the central control means (20) and notify the operator when the ink reservoir reaches a predetermined level. In the preferred embodiment, the low-on-ink sensor (44) is first activated at 30 cc, providing ample time for the operator to refill the ink reservoir (41). The preferred embodiment further generates an out-of-ink signal when the ink level in the reservoir reaches 15 cc.

[0029] As noted above, the marking compositions of the present invention are preferably supplied in a solid state, and subsequently melted to form a molten composition which is applied to the passing fabric via the

printheads. Accordingly, heating means are also provided for those parts of the system through which the molten composition is to flow. Such heating can be achieved by electrical heating elements around the appropriate ducts and/or umbilical lines or by any other suitable means. In the preferred embodiment the heating means consists of resistive wire in the umbilical lines (40) and a cartridge heater (*not shown*) in the reservoir (41).

[0030] It is intended that the printheads be maintained at a higher operating temperature than the ink reservoir. In the preferred embodiment the operating temperatures of the printheads and ink reservoir are 125° and 100° C., respectively. The umbilical lines (40) in effect operate as thermal valves, since only one umbilical line (40) at a time is heated, thereby allowing ink to flow from only that umbilical even if ink pressure is applied to all of the umbilical lines (40) simultaneously.

[0031] Separate control boards (45) are provided for the ink reservoir, with a corresponding serial communication link to communicate with the printhead circuit board sets (PCB1 - PCB13) and the central control means (20). It is contemplated that any printhead (PH1- PH13) through its circuit boards (PCB1- PCB13) can request ink at any time, and that the ink reservoir control board (45) will automatically queue the request, heat the appropriate umbilical line (40) and dispense molten ink until the printhead signals "full" capacity. In addition, it is also contemplated that when the printheads (PH1- PH13) need ink for too long, the printhead circuit board sets (PCB1- PCB13) will produce a signal which allows the central control means (20) to disable the fabric handling device (5). As discussed above, it is also intended that both the out-of-ink and the cover-open conditions will create an output signal from the ink reservoir control board (45), which can also be used to disable the fabric handling device (5).

[0032] A pressure regulator and valve system is also provided to interface with and to purge the printheads. See Figure 5B. The pressure regulator system includes the pressure regulator control boards (50), solenoid valves (51), a vacuum pump (52) and switch (53), and interconnect tubing between the various components (*not shown*). The solenoid valves (51) are provided for sequentially purging each printhead, while automatically providing the proper negative meniscus pressure and "ink refresh" function. The pressure regulator control boards (50) control and sequence the valves and line pressure upon request from any printhead (PH1-PH13), or from the ink reservoir circuit boards (45). As shown in Figures 3 and 5, the pressure regulator system will preferably be located on the Head Mount Beam (10) along with the other components.

[0033] The present invention also incorporates an industrial encoder (60) (*see* Figure 5A) which can track a driven roll (7) in the host spreading machine (5). It is contemplated that any conventional encoder device can be incorporated into the present invention, to register the movement of the fabric and establish fixed process

direction resolution. In a preferred embodiment, the encoder consists of a Model H25 Incremental Optical Encoder, available from BEI Motion Systems Company of Goleta, California.

[0034] The central control means (20) of the present invention is programmed to receive input data from the operator on the fabric size and character selection and to automatically adjust the output of jet-mapped character data to the printheads accordingly. In the preferred embodiment, the central control means consists of a 486 class industrial PC, obtainable from any commercial manufacturer, with precomputed character bitmaps stored therein. The preconfigured jet-mapped character data stored in the central control means is supplied to the printheads in synchronism with the system encoder (60), so that the printing of the characters will be automatically synchronized with the spreader speed.

[0035] In a preferred embodiment, a separate operator control panel (21) as shown in Figure 6 is provided for interfacing with the central control means, and is preferably located at the operator's workstation. In the preferred embodiment of the operator control panel (21), a three-position input switch (22) is provided to select between a light, medium or heavy character marking set, and an input means (23) is further provided for selecting between various roll widths. It is most preferred that the fabric on the spreading machine will always be right-side registered, and that inputting roll widths of less than the maximum will automatically disable printing from one or more printheads, starting from the left side of the Head Mount Beam. A manual character increment button (24) is also preferred, with a liquid crystal display (25) of the alpha-numeric character selected. Additional displays are also contemplated for showing system status (26), ink-level (27) and system fault (28).

[0036] It is contemplated that the printing system will have three different operating modes, controlled by a switch (19) on the operator control panel (21). In the Power Off mode, the heating elements are inactivated and the printheads (PH1-PH13) and reservoir (41) will attain the local ambient temperature. In the Operating Mode, the printheads (PH1-PH13) and the reservoir (41) are maintained at their preferred operating temperatures (nominally 125° and 100° C., respectively). Finally, in the Standby mode the printheads and reservoir temperatures are controlled to approximately 65° C, just below the melting point of the marking composition. This mode allows a faster warmup than the Power Off mode, and will prolong ink and printhead life while allowing for the handling of components without spillage problems. An emergency kill switch (29) is also provided on the operator control panel (21) in the case of an emergency situation requiring the shutdown of the whole machine.

[0037] The invention will now be illustrated by the following Example in which all parts and percentages are given by weight:

#### Example 1

[0038] The contactless hot melt ink jet shademarking system of the present invention was mounted on side-beams incorporated onto a Niebuhr fabric spreader model SY750, obtainable from Niebuhr/Gerber Garment Control Technologies, Tolland, CT. A substrate consisting of a denim fabric material was processed through the fabric spreader. A marking composition was obtained from Spectra, Inc., Hanover, New Hampshire, consisting of a cyan-colored hot melt ink with a melting temperature of approximately 70°-100° C. The marking composition was fed to 13 Model HDS 96i industrial printheads, also obtainable from Spectra, Inc., Hanover, New Hampshire, which were mounted on the Head Mount Beam. The printheads were heated to maintain a temperature of 125° C. +/- 5°, while the umbilical lines were heated to a temperature of 100° C. +/- 5°.

[0039] The umbilical lines were pressurized to ~15 psi gauge and the molten composition printed through the printhead using a ~50 micron bore orifice to produce a series of separate droplets which formed discrete dot images on the passing denim substrate. The images were sharply defined, well anchored to the fabric and resistant to smudging.

[0040] While the shademarking system of the present invention has been described in terms of the preferred embodiment, one skilled in the art will recognize that it would be possible to construct the elements of the present invention from a variety of materials and to modify the placement of the components in a variety of ways. While the preferred embodiments have been described in detail and shown in the accompanying drawings, it will be evident that various further modifications are possible without departing from the scope of the invention as set forth in the following claims.

#### Claims

1. A hot melt ink jet shademarking system for the identification of fabrics and textiles processed through a fabric handling device, comprising:

- a. a head mount beam (10) attached to the fabric handling device (5); and
- b. a series of hot melt ink jet printheads (PH1-PH13) positioned along said head mount beam;
- c. a hot melt ink reservoir (41) coupled with each of said hot melt ink jet printheads;
- d. means for heating and maintaining a hot melt marking composition at a predetermined temperature in both said hot melt ink reservoir and said hot melt ink jet printheads (PH1-PH13) during operation whereby said marking composition is applied in a molten state and solidifies on contact with fabric; and

- e. central control means (20) for activating said printheads and said reservoir to apply a hot melt marking composition in a molten state in a predetermined configuration to a material passing through the fabric handling device. 5
2. The hot melt ink jet shademarking system of claim 1, further comprising means (50-53) for pressurizing said hot melt ink jet printheads (PH1-PH13) to a predetermined level. 10
3. The hot melt ink jet shademarking system of Claim 1 or 2, wherein said central control means (20) is operatively connected with separate individual control means (PCB1-PCB13) for each of said hot melt ink jet printheads (PH1-PH13) and said hot melt ink reservoir (41). 15
4. The hot melt ink jet shademarking system according to any one of claims 1 to 3, further comprising a pressure supply and pressure regulating means coupled (50-53) with said hot melt ink reservoir (41) and said hot melt ink jet printheads (PH1-PH13) and controlled by said central control means (20). 20
5. The hot melt ink jet shademarking system according to any one of claims 1 to 4, further comprising:
- a. means (60) for detecting the passage of fabric from a driven roll (7) through said fabric handling device and said hot melt ink jet shademarking system. 30
6. The hot melt ink jet shademarking system of any one of claims 1 to 5, further comprising:
- a. top and bottom rollers (11, 12) positioned on said head mount beam (10) so as to direct the passing fabric substrate past the said hot melt ink jet printheads (PH1-PH13) located on said head mount beam; and 35
- b. a dancer bar (13) mounted on said fabric handling device (5) so as to redirect the fabric substrate (6) after passing said hot melt ink jet printheads and to maintain sufficient tension in the fabric substrate. 40
7. The hot melt ink jet shademarking system of any one of claims 1 to 6, wherein said hot melt ink reservoir (41) further comprises:
- a. a cover (42); 50
- b. an inlet filter basket (43); and
- c. sensing means (44) for detecting a predetermined hot melt ink level in said hot melt ink reservoir. 55
8. The hot melt ink jet shademarking system of any one of claims 1 to 7, wherein said cover (42) further incorporates a means for disengaging power to said fabric handling device (5) and to the shade-marking system when said cover is opened.
9. The hot melt ink jet shademarking system of any one of claims 1 to 8, wherein said means for heating and maintaining the hot melt ink jet composition at a predetermined temperature in both said hot melt ink reservoir (41) and said hot melt ink jet printheads (PH1- PH13) further comprises:
- a. resistive wire in the umbilical attachments (40) between said hot melt ink reservoir and said hot melt ink jet printheads; and
- b. a cartridge heater in said reservoir.
10. The hot melt ink jet shademarking system of any one of claims 4 to 9, wherein said pressure supply and pressure regulating means further comprises:
- a. a series of solenoid valves (51) operatively connected to said ink jet printheads (PH1-PH13) and to said hot melt ink reservoir (41);
- b. a vacuum pump (52); and
- c. a pressure regulator (50).
11. The hot melt ink jet shademarking system of any one of claims 1 to 10, wherein said central control means (20) automatically selects an appropriate configuration for maximum visibility and minimum ink consumption based on input fabric information.
12. The hot melt ink jet shademarking system of any one of claims 1 to 11, wherein said central control means (20) automatically adjusts for varying widths of material
13. The hot melt ink jet shade marking system according to any one of claims 1 to 12 wherein said fabric handling device (5) is a spreader or a loom.
14. The hot melt ink jet shademarking system according to any one of claims 1 to 13, wherein said central control means (20) comprises a master controller operatively connected to separate individual control means (PCB1-PCB13) for each of said hot melt ink jet printheads (PH1-PH13) said hot melt ink reservoir (41), and said pressure supply and pressure regulating means (50-53).
15. The hot melt ink jet shademarking system according to any one of claims 5 to 14, wherein said first sensing means (60) is in communication with said master controller whereby said master controller can control the frequency with which said printheads (PH1-PH13) are fired to shademark the passing fabric.

# **Patentansprüche**

1. Heißschmelz-Tintenstrahl-Schattierungsmarkierungssystem zum Identifizieren von Geweben und Textilien, die von einer Gewebetransporteinrichtung verarbeitet wurden, das Schattierungsmarkierungssystem aufweisend:

a) einen Kopfinontageträger (10), der an der Gewebetransporteinrichtung (5) angebracht ist;

b) eine Folge von Heißschmelz-Tintenstrahl-Druckköpfen (PH1-PH13), die entlang des Kopfmontageträgers positioniert sind;

c) einen Heißschmelz-Tintenvorratsbehälter (41), der mit jedem der Heißschmelz-Tintenstrahl-Druckköpfe verbunden ist;

d) Mittel zum Heizen einer Heißschmelz-Markierungszusammensetzung auf eine vorbestimmte Temperatur und zum Halten der Heißschmelz-Markierungszusammensetzung auf der vorbestimmten Temperatur in dem Heißschmelz-Tintenvorratsbehälter und den Heißschmelz-Tintenstrahl-Druckköpfen (PH1-PH13) während eines Betriebs, wodurch die Markierungszusammensetzung in einem geschmolzenen Zustand angewendet und in Kontakt mit dem Gewebe verfestigt wird; und

e) zentrale Steuermittel (20) zum Aktivieren der Druckköpfe und des Vorratsbehälters zum Anwenden einer Heißschmelz-Markierungszusammensetzung in einem Schmelzzustand in einer vorbestimmten Konfiguration auf ein Material, das durch die Gewebetransporteinrichtung gelangt.

2. Vorrichtung nach Anspruch 1, gekennzeichnet durch Mittel (50-53) zur Druckbeaufschlagung der Heißschmelz-Tintenstrahl-Druckköpfe (PH1-PH13) auf ein vorbestimmtes Niveau.

3. Vorrichtung nach Anspruch 1 oder 2, wobei für jeden der Heißschmelz-Tintenstrahl-Druckköpfe (PH1-PH13) und jeden Heißschmelz-Tintenvorratsbehälter (41) die zentralen Steuermittel (20) mit getrennten, einzelnen Steuermitteln (PCB1-PCB13) betreibbar verbunden sind.

4. Vorrichtung nach einem der Ansprüche 1 bis 3, gekennzeichnet durch Druckzuführ- und Druckregelmittel (50-53), die mit dem Heißschmelz-Tintenvorratsbehälter (41) und den Heißschmelz-Tintenstrahl-Druckköpfen (PH1-PH13) verbunden sind, und mittels der zentralen Steuermittel (20) gesteu-

ert werden.

5. Vorrichtung nach einem der Ansprüche 1 bis 4, gekennzeichnet durch Mittel (60) zum Erfassen des Durchgangs des Gewebes von einer Antriebsrolle (7) durch die Gewebetransporteinrichtung und das Heißschmelzen-Tintenstrahl-Schattierungsmarkierungssystem.

6. Vorrichtung nach einem der Ansprüche 1 bis 5, gekennzeichnet durch

a) eine obere und eine untere Rolle (11, 12), die an dem Kopfinontageträger (10) so positioniert sind, daß das durchgehende Gewebesubstrat nach den auf dem Kopfmontageträger montierten Heißschmelz-Tintenstrahl-Druckköpfen (PH1-PH13) gerichtet wird; und

b) einen bewegbaren Stab (13), der an der Gewebetransporteinrichtung (5) montiert ist, so daß das Gewebesubstrat (6) nach dem Durchgang durch die Heißschmelz-Tintenstrahl-Druckköpfe umgelenkt wird und in dem Gewebesubstrat eine ausreichende Spannung erhalten bleibt.

7. Vorrichtung nach einem der Ansprüche 1 bis 6, der Heißschmelz-Tintenvorratsbehälter (41) aufweisend:

a) eine Hülle (42);

b) einen Einlaßfilterkorb (43); und

c) Abtastrmittel (44) zum Erfassen eines vorbestimmten Heißschmelz-Tintenniveaus in dem Heißschmelz-Tintenvorratsbehälter.

8. Vorrichtung nach einem der Ansprüche 1 bis 7, wobei die Hülle (42) Mittel zum Unterbrechen der Energie an der Gewebetransporteinrichtung (5) und dem Schattierungsmarkierungssystem umfaßt, wenn die Hülle geöffnet ist.

9. Vorrichtung nach einem der Ansprüche 1 bis 8, die Mittel zum Heizen und zum Halten der Heißschmelz-Tintenstrahl-Zusammensetzung auf einer vorbestimmten Temperatur in dem Heißschmelz-Tintenvorratsbehälter (41) und den Heißschmelz-Tintenstrahl-Druckköpfen (PH1-PH13) weiterhin aufweisend:

a) einen Widerstandsdraht in den Versorgungsanschlüssen (40) zwischen dem Heißschmelz-Tintenvorratsbehälter und dem Heißschmelz-Tintenstrahl-Druckköpfen; und

- b) einen Patronenheizer in dem Vorratsbehälter.
10. Vorrichtung nach einem der Ansprüche 4 bis 9, die Druckzuführ- und die Druckregelmittel weiterhin aufweisend: 5
- a) eine Folge von Magnetventilen (51), die mit den Tintenstrahl-Druckköpfen (PH1-PH13) und dem Heißschmelz-Tintenvorratsbehälter (41) betreibbar verbunden sind; 10
- b) eine Vakuumpumpe (52); und
- c) einen Druckregler (50). 15
11. Vorrichtung nach einem der Ansprüche 1 bis 10, wobei die zentralen Steuermittel (20) eine geeignete Konfiguration für eine maximale Sichtbarkeit und einen minimalen Tintenverbrauch auf der Basis einer Eingabegewebeinformation automatisch auswählen. 20
12. Vorrichtung nach einem der Ansprüche 1 bis 11, wobei die zentralen Steuermittel (20) veränderte Materialbreiten automatisch einstellen. 25
13. Vorrichtung nach einem der Ansprüche 1 bis 12, wobei die Gewebetransporteinrichtung (5) eine Webmaschine oder eine Aufstreichmaschine ist. 30
14. Vorrichtung nach einem der Ansprüche 1 bis 13, wobei die zentralen Steuermittel (20) eine Hauptsteuereinrichtung aufweisen, die mit den getrennten, einzelnen Steuermitteln (PCB1-PCB13) für jeden der Heißschmelz-Tintenstrahl-Druckköpfe (PH1-PH13), dem Heißschmelz-Tintenvorratsbehälter (41) und den Druckzuführ- und den Druckregelmitteln (50—53) betreibbar verbunden ist. 35
15. Vorrichtung nach einem der Ansprüche 5 bis 14, wobei erste Abtastmittel (60) mit der Hauptsteuereinrichtung in Verbindung stehen, wodurch die Hauptsteuereinrichtung die Frequenz steuern kann, mit welcher die Druckköpfe PH1-PH13 gezündet werden, um das durchgehende Gewebe mit Schattierungen zu markieren. 40
- Revendications**
1. Système de marquage par nuance par jet d'encre fixée à chaud pour l'identification de tissus et de textiles traités dans un dispositif de manutention de tissu, comprenant : 45
- a. un bâti de montage des têtes (10) fixé sur le dispositif de manutention de tissu (5) et
- b. une série de têtes d'impression (PH1-PH13) par jet d'encre fixée à chaud placées le long du dit bâti de montage des têtes ;
- c. un réservoir d'encre fixée à chaud (41) couplé à chacune desdites têtes d'impression par jet d'encre fixée à chaud ;
- d. un moyen de chauffage et de maintien d'une composition de marquage fixée à chaud à une température prédéterminée à la fois dans ledit réservoir d'encre fixée à chaud et lesdites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13) au cours du fonctionnement, ce qui permet que ladite composition de marquage soit appliquée à l'état fondu et se solidifie au contact du tissu ; et
- e. un moyen de commande centrale (20) pour activer lesdites têtes d'impression et ledit réservoir afin d'appliquer une composition de marquage fixée à chaud à l'état fondu dans une configuration prédéterminée sur un matériau qui passe à travers le dispositif de manutention du tissu.
2. Système de marquage par nuance par jet d'encre fixée à chaud selon la revendication 1, comprenant en outre des moyens (50-53) pour mettre sous pression lesdites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13) à un niveau prédéterminé.
3. Système de marquage par nuance par jet d'encre fixée à chaud suivant la revendication 1 ou 2, dans lequel ledit moyen de commande centrale (20) est relié, pour fonctionner, aux moyens de commande séparée (PCB1-PCB13) pour chacune desdites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13), et ledit réservoir d'encre fixée à chaud (41).
4. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 3, comprenant en outre un moyen de régulation de la pression et un moyen d'alimentation en pression (50-53) couplés audit réservoir d'encre fixée à chaud (41) et aux dites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13) et commandées par ledit moyen de commande centrale (20).
5. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 4, comprenant en outre :
- a. des moyens (60) de détection du passage du tissu à partir d'un rouleau mené (7) à travers ledit dispositif de manutention du tissu et ledit système de marquage par nuance par jet d'encre fixée à chaud.



6. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 5, comprenant en outre :
- a. des rouleaux supérieur et inférieur (11, 12) placés sur ledit bâti de montage des têtes (10) de façon à orienter le substrat de tissu passant devant lesdites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13) situées sur ledit bâti de montage des têtes ; et
  - b. une barre libre (13) montée sur ledit dispositif de manutention du tissu (5) de façon à réorienter le substrat de tissu (6), après qu'il soit passé devant lesdites têtes d'impression par jet d'encre fixée à chaud et à maintenir une tension suffisante du substrat de tissu.
7. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 6, dans lequel ledit réservoir à encre fixée à chaud (41) comprend en outre :
- a. un couvercle (42) ;
  - b. un panier filtre d'admission (43) ; et
  - c. un moyen de détection (44) pour détecter un niveau d'encre fixée à chaud prédéterminé dans ledit réservoir d'encre fixée à chaud.
8. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 7, dans lequel ledit couvercle (42) intègre en outre un moyen de coupure de l'alimentation en courant dudit dispositif de manutention du tissu (5) et dudit système de marquage par nuance lorsque ledit couvercle est ouvert.
9. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 8, dans lequel lesdits moyens de chauffage et de maintien à une température prédéterminée de la composition d'encre fixée à chaud à la fois dans ledit réservoir d'encre fixée à chaud (41), et lesdites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13) comprennent en outre :
- a. un fil de résistance placé sur les lignes ombilicales (40) entre ledit réservoir d'encre fixée à chaud et lesdites têtes d'impression par jet d'encre fixée à chaud ; et
  - b. une cartouche chauffante dans ledit réservoir.
10. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 4 à 9, dans lequel lesdits moyens de régulation de pression et d'alimentation en pression comprennent en outre :
- a. une série d'électrovannes (51) reliées pour fonctionner aux dites têtes d'impression par jet d'encre (PH1-PH13) et audit réservoir d'encre fixée à chaud (41) ;
  - b. une pompe à vide (52) ; et
  - c. un régulateur de pression (50).
11. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 10, dans lequel ledit moyen de commande centrale (20) choisit automatiquement une configuration appropriée pour une visibilité maximale et une consommation d'encre minimale en se fondant sur les informations entrées concernant le tissu.
12. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 11, dans lequel ledit moyen de commande centrale (20) se règle automatiquement pour les différentes largeurs de matériau.
13. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 12, dans lequel ledit dispositif de manutention de tissu (5) est un chariot étendeur de tissu ou un métier à tisser.
14. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 1 à 13, dans lequel ledit moyen de commande centrale (20) comprend un contrôleur principal relié, pour fonctionner, aux moyens de commande séparés (PCB1-PCB13) pour chacune desdites têtes d'impression par jet d'encre fixée à chaud (PH1-PH13), audit réservoir d'encre fixée à chaud (41) et aux dits moyens de régulation de pression et d'alimentation en pression (50-53).
15. Système de marquage par nuance par jet d'encre fixée à chaud selon l'une quelconque des revendications 5 à 14, dans lequel ledit premier moyen détecteur (60) est en communication avec ledit contrôleur principal ce qui permet audit contrôleur principal de commander la fréquence à laquelle lesdites têtes d'impressions (PH1-PH13) sont actionnées pour marquer par nuance le tissu passant.

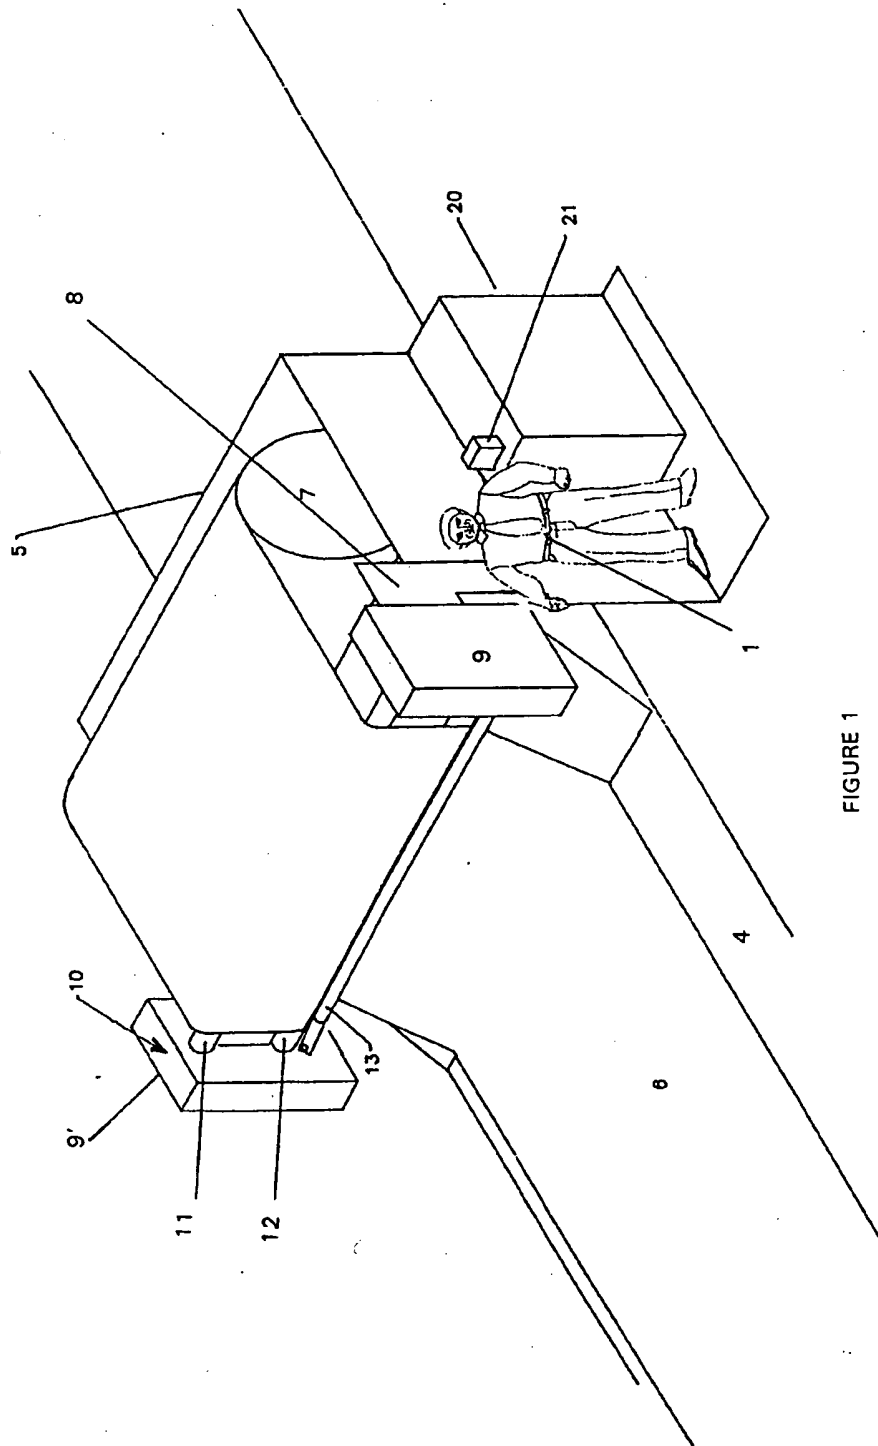
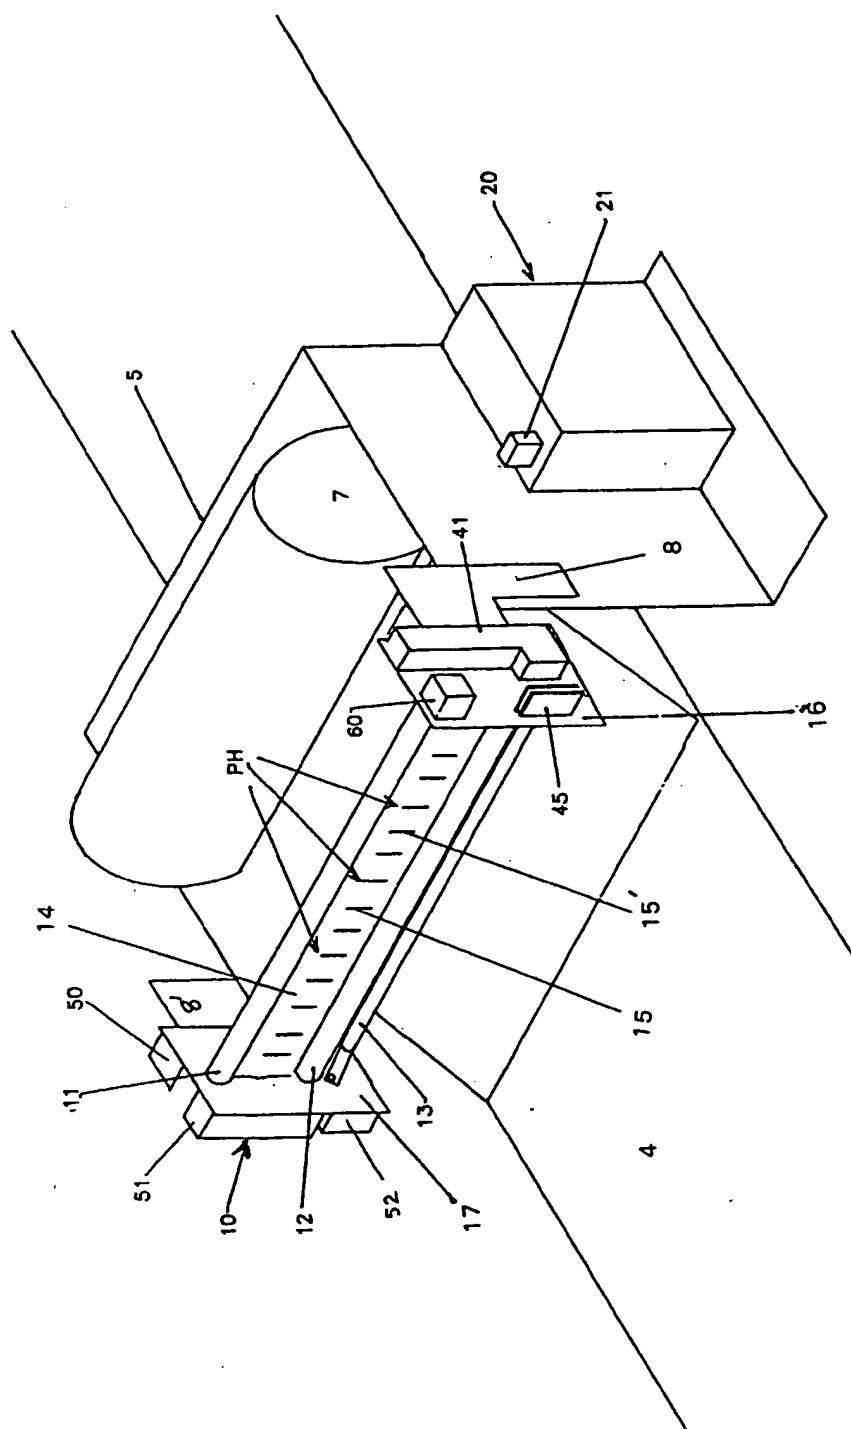


FIGURE 1



**FIGURE 2**

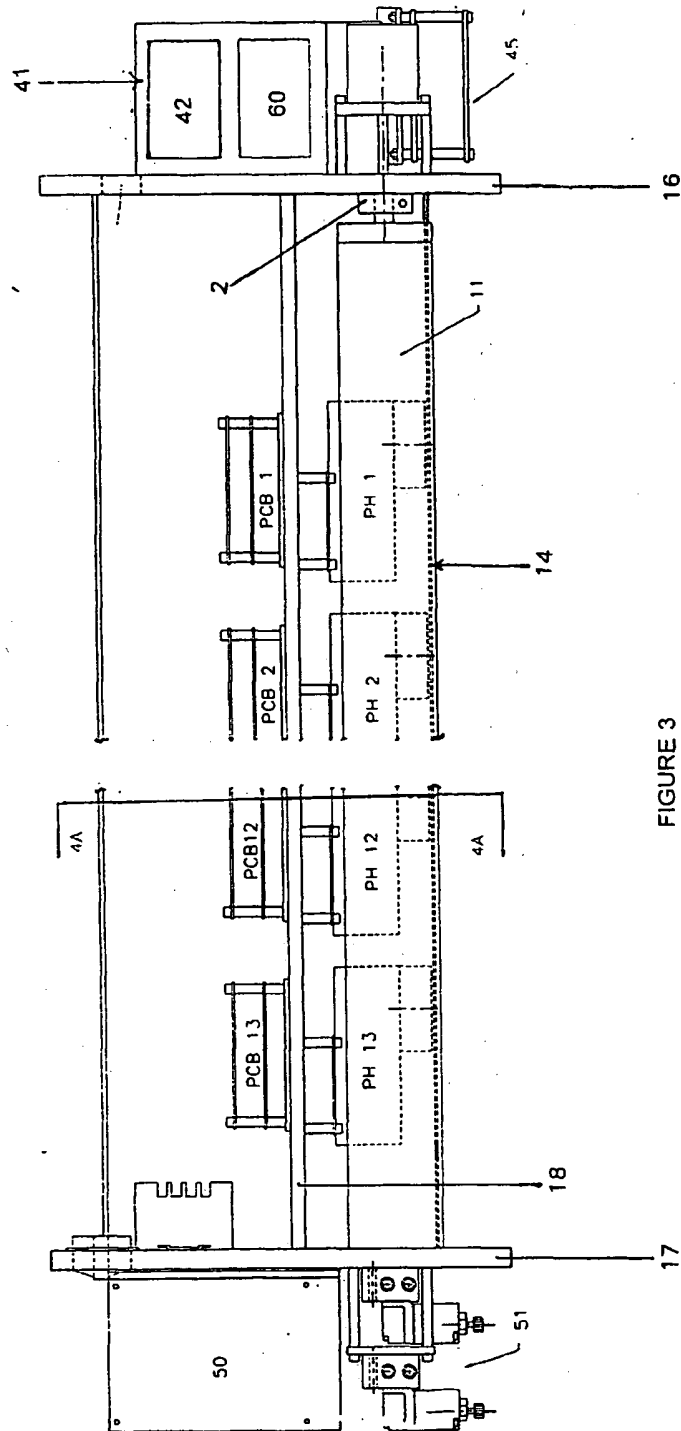


FIGURE 3

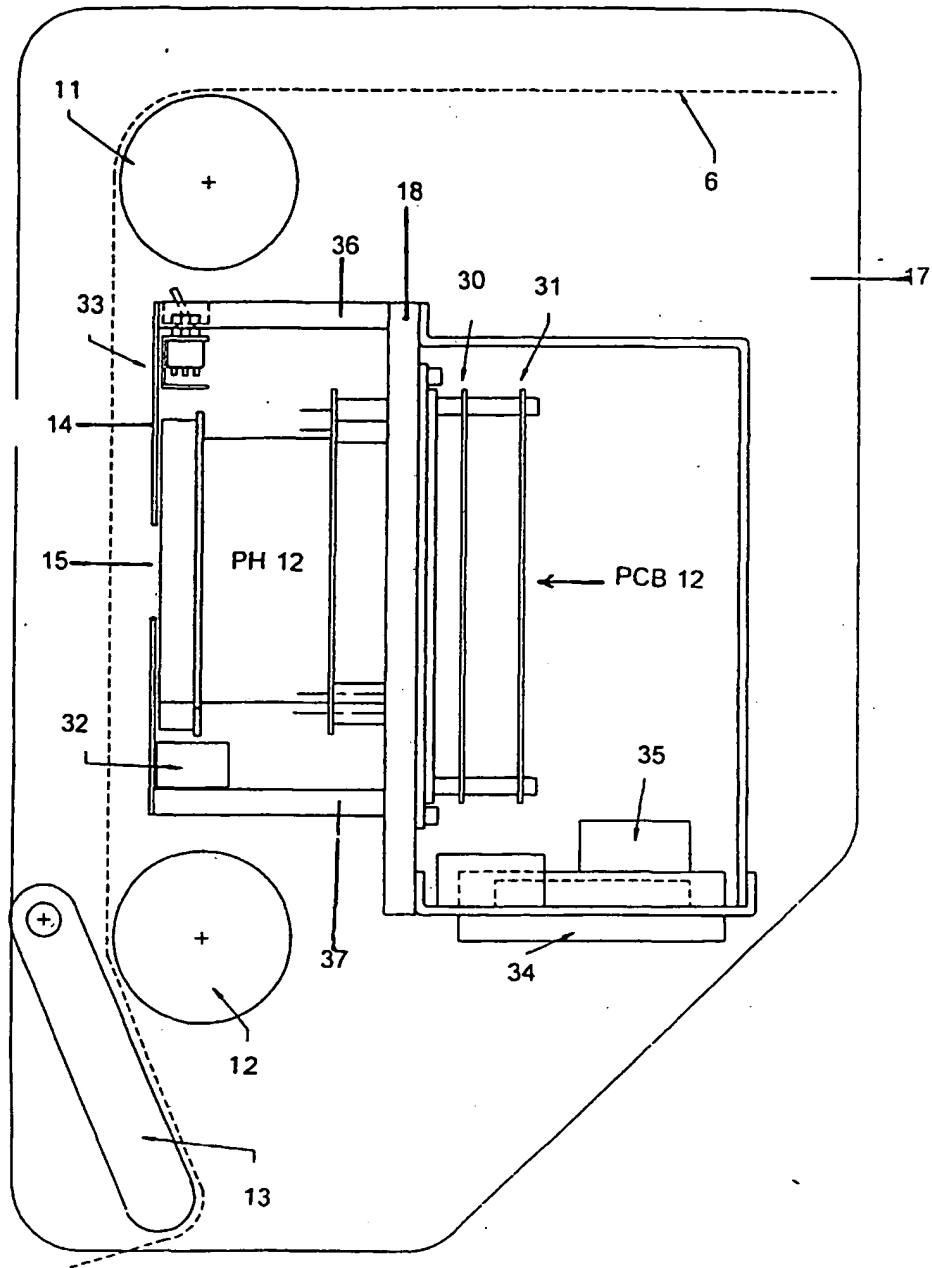


FIGURE 4A

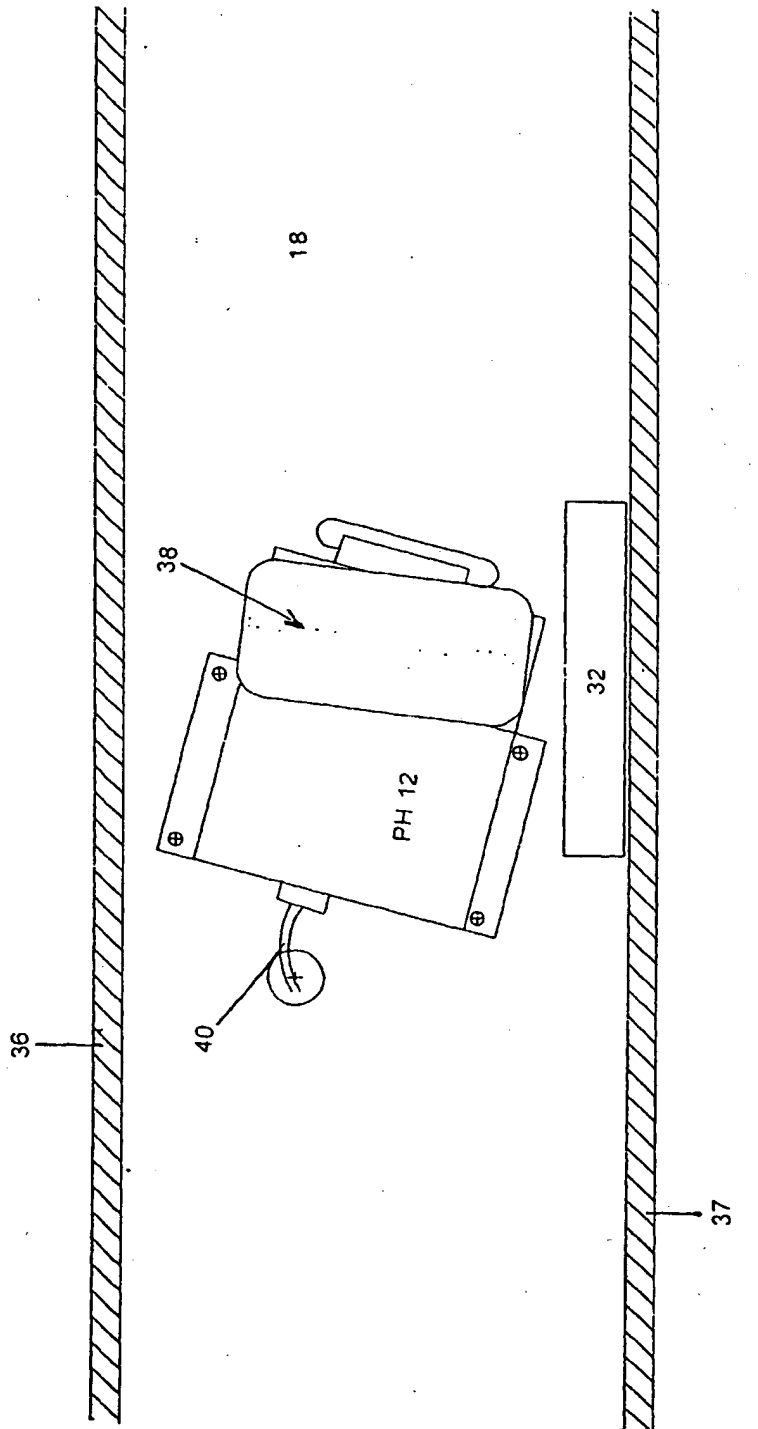
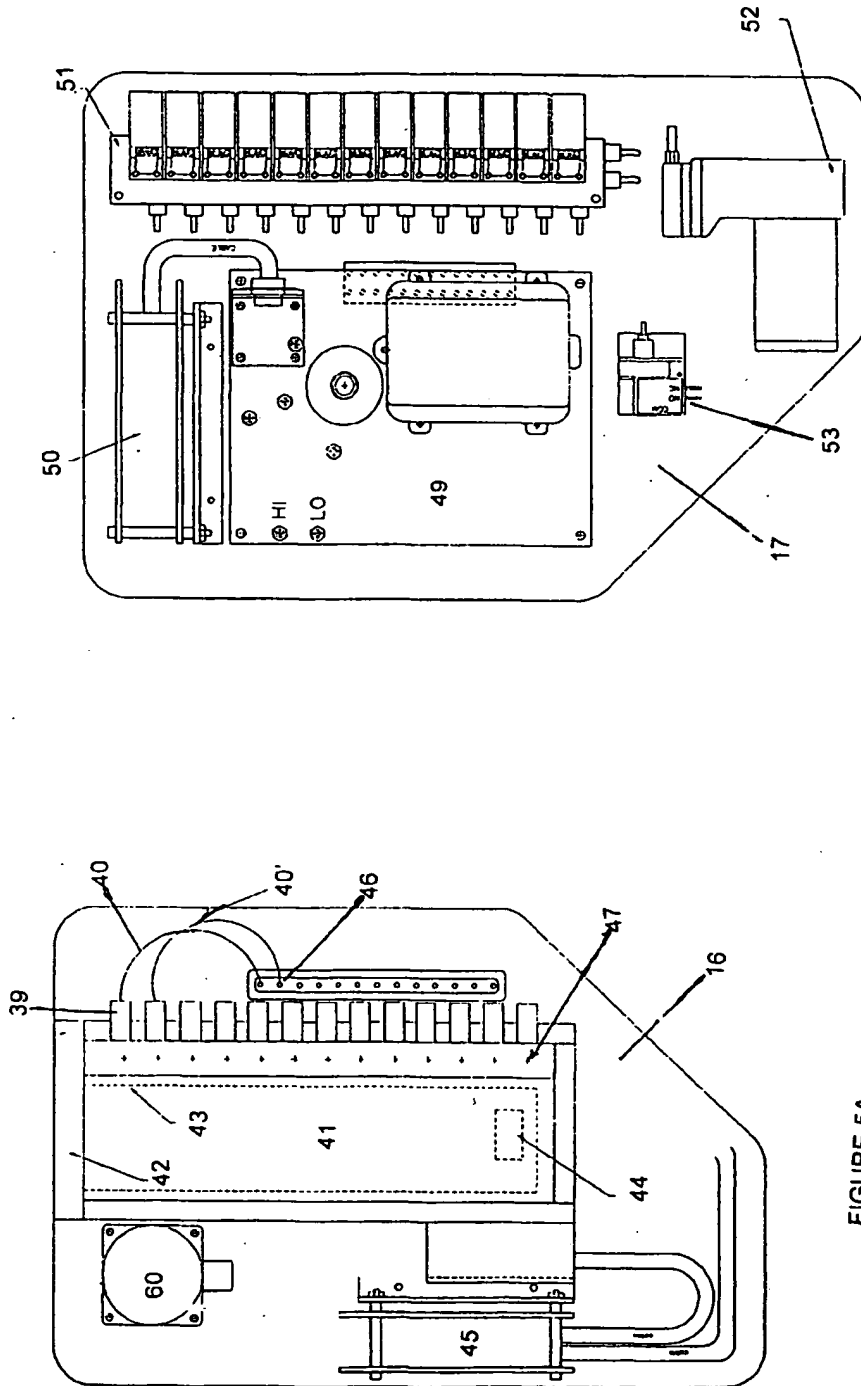


FIGURE 4B



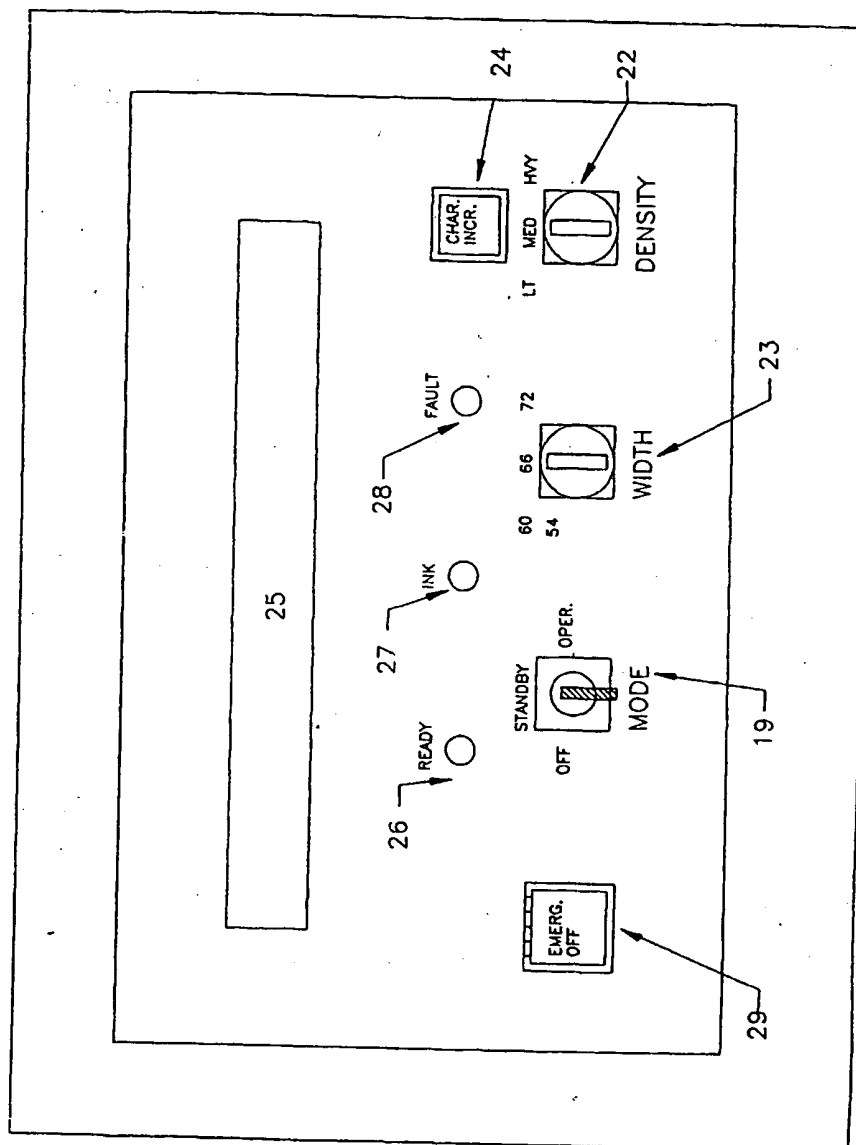


FIGURE 6